


AAA-R

Ni-MH Battery



Dimensions

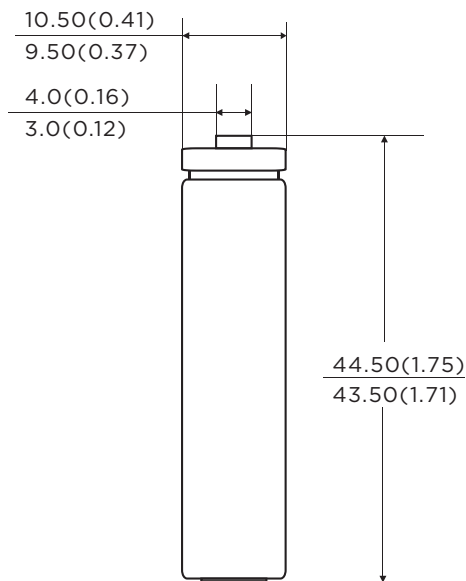

Unit:mm(inch)

Specifications

Chemical System:	Nickel Metal Hydride
IEC Name:	HR03M
ANSI/NEDA:	1.2H1(AA)
Westinghouse Model:	NH-AAA800AR
Average Weight:	10g
Dimension(\varnothing x H):	10.0 \pm 0.5 x 44.0 \pm 0.5 mm 0.39 \pm 0.02 x 1.73 \pm 0.02 inch
Terminals:	Flat
Nominal Voltage:	1.2Volts
Internal Resistance:	45m-ohm
Capacity(160mA constantly discharge to 1.0V at 25 \pm 2 $^{\circ}$ C)	
Minimum:	750mAh
Typical:	800mAh
Operating Temperature:	-10 $^{\circ}$ C-50 $^{\circ}$ C
Storage Temperature:	15 $^{\circ}$ C-25 $^{\circ}$ C
Relative Humidity:	60 \pm 15%
Jacket :	PVC
Available period:	5 years(Temperature: 20 \pm 2 $^{\circ}$ C, Relative Humidity: 60% \pm 15%)

Usage Guide



Shaver



Toy



Digital Still Camera

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals.
- Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

Notice:

Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@westinghousebattery.com.


 and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by Camelion Battery, Ltd. All Rights Reserved.

NH-AAA800AR
Ni-MH Battery

Storage for 60months


Measurement temperature: $20 \pm 2^\circ\text{C}$

Storage procedure: storage for 60months,
measure the voltage and then perform capacity test

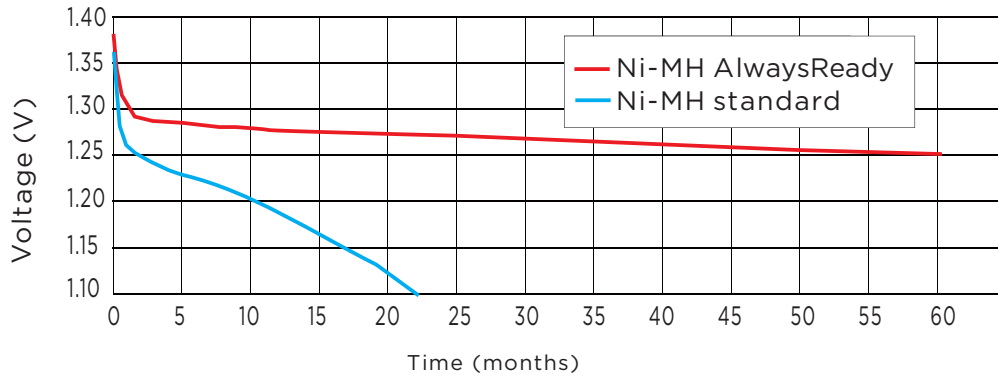

Charge Characteristics


Measurement temperature: $25 \pm 2^\circ\text{C}$

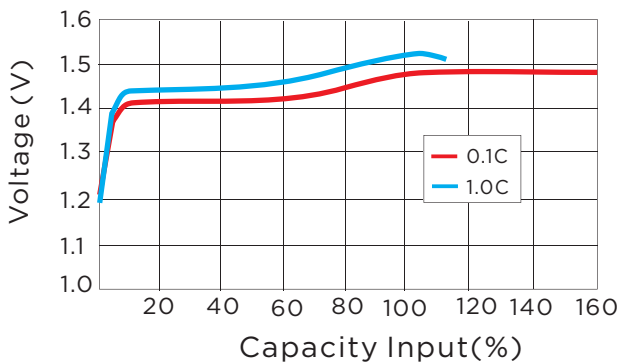

Discharge Characteristics

Measurement temperature: $25 \pm 2^\circ\text{C}$

Charge: $0.1\text{C} \times 16\text{hrs}$

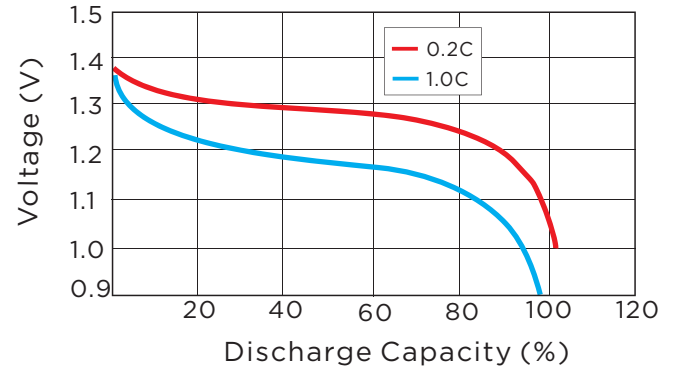


IEC Cycle Life Curve

Measurement temperature: $25 \pm 2^\circ\text{C}$

Procedure: According to IEC61951-2(2011)


7.5.1.2

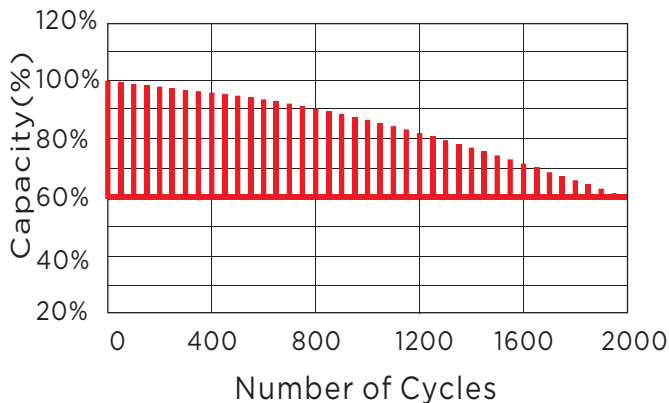

Temperature Characteristics


Procedure: Charge 16hrs by 0.1C ; Rest for 60mins

Discharge to 1.0V by 0.2C

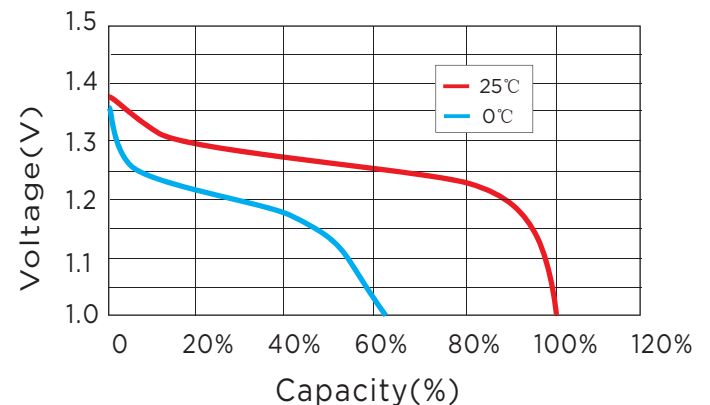

Notice:

Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@westinghousebattery.com.

 and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by Camelion Battery, Ltd. All Rights Reserved.