
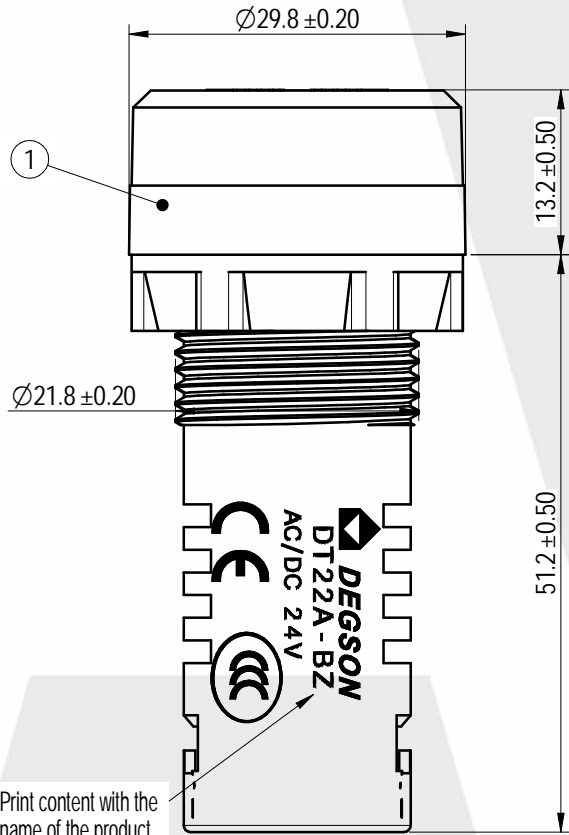


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50	



Print content with the name of the product

DT22A - XBZ / Y AC/DCZV L  
 (Series No.)  
 (Product Type): BZ: Buzzer  
 FBZ: Flash buzzer  
 (product standard):  
 L: Long  
 (Voltage grade):  
 AC/DC: 6/12/24/36/48/  
 110/220V  
 AC: 110/220/380V  
 (Color): RD: (Red)  
 (Black)

ITEM	NAME OF PART	MATERIAL	NOTES
1	Buzzer	/	/

海拔高度/Altitude height(m)	≤2000
使用环境温度/Environment temperature(°C)	-25~+55
储存环境温度/Storage temperature(°C)	-40~+70
空气相对湿度/Relative humidity	≤90%
污染等级/Pollution class	3
安装类别/Install type	III
防护等级/Front protect class	IP40
接线方式/Terminal type	带垫片螺钉接线
工作电流/Current(mA)	≤20
蜂鸣器分贝/The decibel of buzzer(dB)	80
LED灯寿命/Life of signal lamps(H)	≥50000
灯罩材质/lampshade material	PC
螺钉材质/Screw material	铁
外壳材质/body material	PA66
底盖材质/base material	ABS

Arlex SA. Humberto I 2848 (1231) CABA. Tel.: +54 11 3984-8240  
 www.arlex.com.ar

MATERIAL:	SURFACE/COLOR:	
MAT NO./REV:	MAT STATUS: 小批量	
APPD:	2022. 10. 12	NAME
CHKD:	2022. 10. 12	DT22A-FBZ-RDAC
DRFT:	2022. 10. 12	DRAWING NO. 200114817
A4		TYPE CUSTOMER DRAWING
SCALE 1.5:1		DRAWING STATUS work
SHEET 1/1		

REV	ECN	DESCRIPTION	DRFT	DATE
00		New Drawing	马恩开	2022. 10. 12