



# Arlex®

未注公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

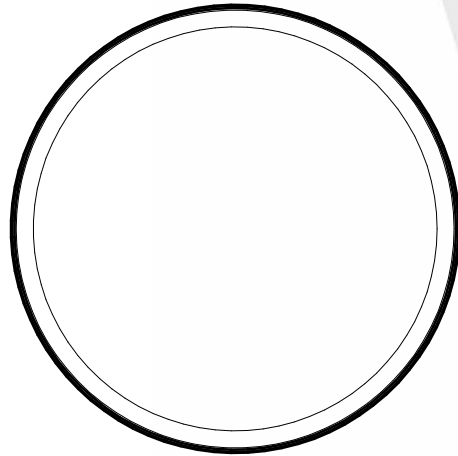


Ø29.8 ± 0.20

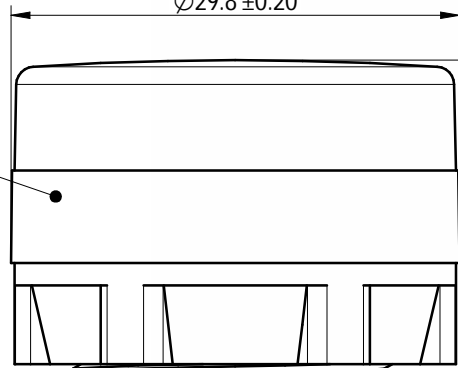

13.6 ± 0.20

1

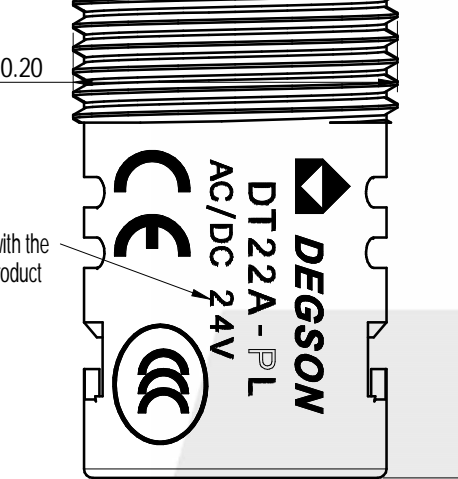

Ø21.8 ± 0.20

38.5 ± 0.5

Print content with the name of the product

DT22A - PL / Y AC/DCZV S (product standard):  
 S: Short  
 (Voltage grade):  
 AC/DC: 6/12/24/36/48/  
 110/220V  
 AC: 110/220/380V  
 (Color): RD: (Red)  
 GN: (Green)  
 YE: (Yellow)  
 WH: (White)  
 BU: (Blue)

ITEM	NAME OF PART	MATERIAL	NOTES
1	Pilot Lamp	/	/

连续工作寿命/Continuous working life(H)	≥4W
允许瞬间电压波动/transient voltage fluctuations are allowed	±20%(110V以上)
工频耐压/Power frequency withstand voltage	2.5kV(交流有效值), 1min
使用频率(AC)/operating frequency(AC)	50-60Hz
额定工作电流/rated operational current(mA)	≤20
光亮度/brightness	≥100cd/m <sup>2</sup>
相比漏电起痕指数CTI/comparative tracking index	≥100, 阻燃
绝缘电阻/insulation resistance	U <sub>i</sub> ≤ 60V为5mΩ 60 < U <sub>i</sub> ≤ 660V为50mΩ
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV:	/	MAT STATUS:	
NAME			
DT22A-PL-GNAC			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
200112723	CUSTOMER DRAWING	work	2:1
SHEET		1/1	

Arlex SA. Humberto | 2848 (1231) CABA. Tel.: | 13984-8240  
www.arlex.com.ar

REV	ECN	DESCRIPTION	DRFT	DATE	④	⑤	A4	←mm (inch)
00		New Drawing	马恩开	2022.10.12	DRFT:		2022.10.12	

1 2 3 4 5 6