



1.14 TYP.

A

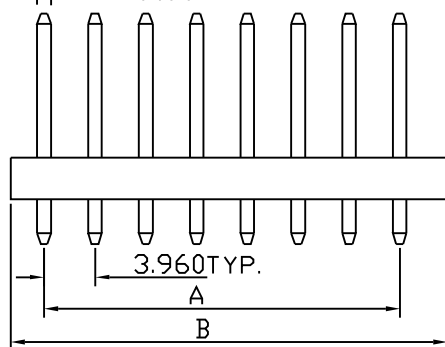


B

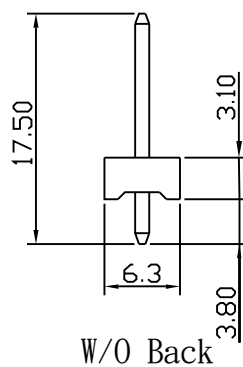


W/O Back

C

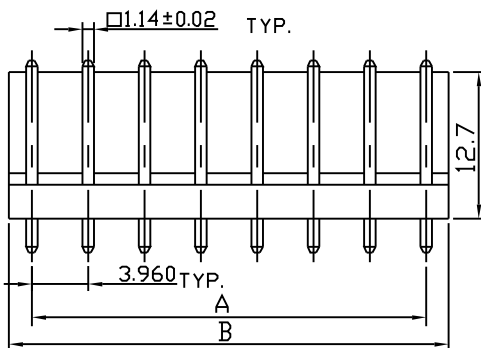

D



W/Back

E

SPECIFICATION

Voltage Rating: 250V AC/DC

Current Rating: 5A AC/DC

Temperature Range: -25 ° C ~+85° C

Contact Resistance: 10 Milliohms Max.

Insulation Resistance: 1,000 Megohms Min.

Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.

Material: Nylon 66, UL94V-2

Color: White

Pin: Brass, Tin Plated

A

B

C

D

E

F

G

H

ORDER INFORMATION

F

W 400—
02-20 P: Non Distribution S: Straight Y: W/ Back N: W/O Back T: Tin S: Selective Gold G: Gold Flash W: White Fill It With "0"

G

Arlex

PW20TS

UNIT

MM

SCALE

3 : 1

PART NAME

MX3.96 WAFER 180°

H

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

± 0.3

PART NO.

PW20TS
(=W2400-20PSNTW0)

REV.

A

1

2

3

4

5

6

7

8